

Garden Bench

(GB48 Aassembled Kit)

Tools Required: #2 Philips driver, wood glue (optional).

Before Assembly: check all components with content list and **dry fit the parts together** before gluing.


(NOTE: after dry-fit, wood glue should be used on all dowel joints)

Package Contents:

- (a) Back-Slat Assembly ...1
- (b) Seat Assembly...1
- (c) Arm/Leg Assembly...2
- (d) Front Rail...1
- (e) Back Rail...1

Hardware:

- 2" Connector Bolt ...8
- 2" Zinc Screw...8

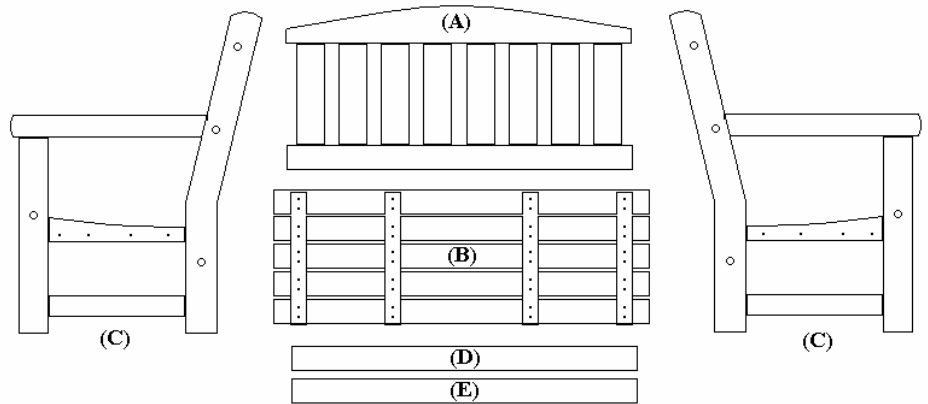

Step 1. Bench Assembly

- Place front rail between 2 front legs and attach using connector bolts.
- Place back slat assembly between 2 rear legs and attach using connector bolts.
- Set back rail between lower rear legs and attach using connector bolts.
- Insert seat assembly between sides and attach from beneath using 2 inch screws.
- Your New Bench is ready for use.

